

STA

vibro and grouting
equipment

www.sta-milano.com



M4 T50

*POMPE D'INJECTION
grout pump*


500 lt/min - 250 bar

S.T.A. srl - Via delle Industrie 2 - 20060 Mediglia (Mi) - Italia
tel.+39 02 90661181 - fax + 39 02 90660421 - e-mail: info@sta-milano.com

M4 T50

POMPE D'INJECTION
grout pump

500 lt/min - 250 bar

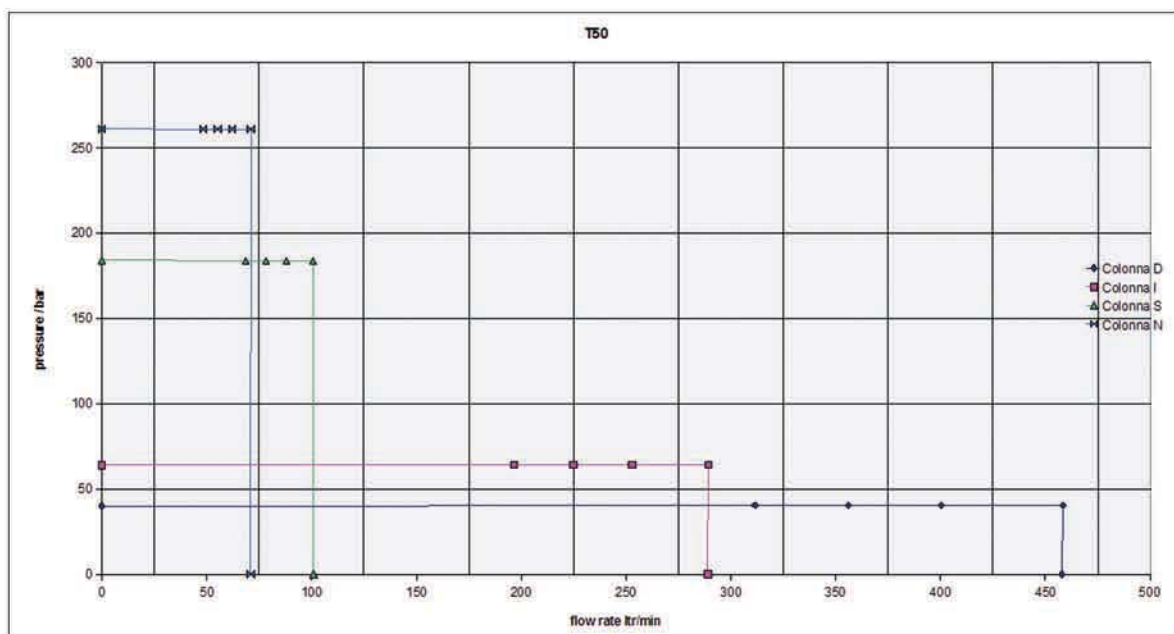

Caractéristiques techniques / Technical Features

Double piston plongeur / Double plunging pistons

Puissance installée / Electric motor

22/40 Kw

Pompe hydraulique à débit variable / Variable displacement pump

Diamètre piston / Piston diameter

63 - 75 - 127 - 160 mm

Course du piston / Piston stroke

400 mm

Pression de coulis max / Grouting pressure max

250 bar

Diamètre d'aspiration / Suction diameter

3"

Diamètre d'injection / Output diameter

3"

Débit coulis max / Flow rate max

500 lt/min

Dimensioni e peso / Overall dimensions and weight

Largeur / Width:

1.200 mm

Hauteur / Height:

1.500 mm

Longueur / Length:

2.300 mm

Poids / Weight:

1.750 Kg